


SNV .../.... L

- Reducer fittings
- with taper and O-rings made from NBR* (e.g. Perbunan) at both ends
- in each case, one nut can be pushed back to the rear edge of the O-ring groove
- Light-duty range

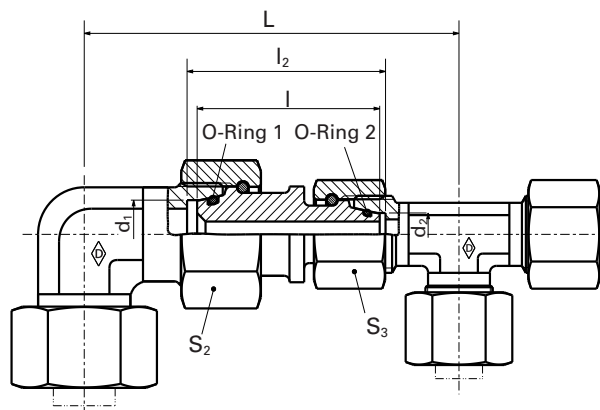


F

												Fitting SNV .../ ...
Series	PN bar (psi)	Tube outer diameter d ₁	Tube outer diameter d ₂	Model	L	I	I ₂	S ₁	S ₂	*O-ring 1	*O-ring 2	Part no.
L	500 (7252)	8	6	SNV 8/ 6 L	64	34	36	17	17	6 x 1.5	4.5 x 1.5	WAL612675
		10	6	SNV 10/ 6 L	65.5	35	36.5	19	17	8.5 x 1.5	4.5 x 1.5	WAL612676
		10	8	SNV 10/ 8 L	65.5	35	36.5	19	17	8.5 x 1.5	6 x 1.5	WAL612677
	400 (5801)	12	6	SNV 12/ 6 L	67.5	35	36.5	22	17	10 x 1.5	4.5 x 1.5	WAL612678
		12	8	SNV 12/ 8 L	68.5	36	37.5	22	17	10 x 1.5	6 x 1.5	WAL374358
		12	10	SNV 12/10 L	69.5	36.5	37.5	22	19	10 x 1.5	8.5 x 1.5	WAL612679
		15	8	SNV 15/ 8 L	73	36.5	38	27	17	12 x 2	6 x 1.5	WAL612680
		15	10	SNV 15/10 L	74.5	37.5	38.5	27	19	12 x 2	8.5 x 1.5	WAL612681
		15	12	SNV 15/12 L	83	44	45	27	22	12 x 2	10 x 1.5	WAL612682
		18	10	SNV 18/10 L	78	38	39.5	32	19	15 x 2	8.5 x 1.5	WAL612683
		18	12	SNV 18/12 L	80	38	39.5	32	22	15 x 2	10 x 1.5	WAL612684
		18	15	SNV 18/15 L	91	45	46.5	32	27	15 x 2	12 x 2	WAL612685
		22	12	SNV 22/12 L	86.5	40.5	42	36	22	20 x 2	10 x 1.5	WAL612686
		22	15	SNV 22/15 L	92	42	43.5	36	27	20 x 2	12 x 2	WAL612687
		22	18	SNV 22/18 L	98	45	47	36	32	20 x 2	15 x 2	WAL612688
		28	15	SNV 28/15 L	96	43	44.5	41	27	26 x 2	12 x 2	WAL612689
		28	18	SNV 28/18 L	100	44	46	41	32	26 x 2	15 x 2	WAL612690
	250 (3626)	28	22	SNV 28/22 L	106	46	48	41	36	26 x 2	20 x 2	WAL612691
		35	18	SNV 35/18 L	109.5	48	51.5	50	32	32 x 2.5	15 x 2	WAL612692
		35	22	SNV 35/22 L	115	49.5	53	50	36	32 x 2.5	20 x 2	WAL612693
		35	28	SNV 35/28 L	118.5	50	53.5	50	46	32 x 2.5	26 x 2	WAL612694
		42	22	SNV 42/22 L	121	49.5	53.5	60	36	38 x 2.5	20 x 2	WAL612695
		42	28	SNV 42/28 L	124.5	50	54	60	46	38 x 2.5	26 x 2	WAL612696
		42	35	SNV 42/35 L	133	53	58.5	60	50	38 x 2.5	32 x 2.5	WAL612697

*For FPM (e.g. Viton) see price list / available on request

SNV .../ ... S

- Reducer fittings
- with taper and O-rings made from NBR* (e.g. Perbunan) at both ends
- in each case, one nut can be pushed back to the rear edge of the O-ring groove
- Heavy-duty range

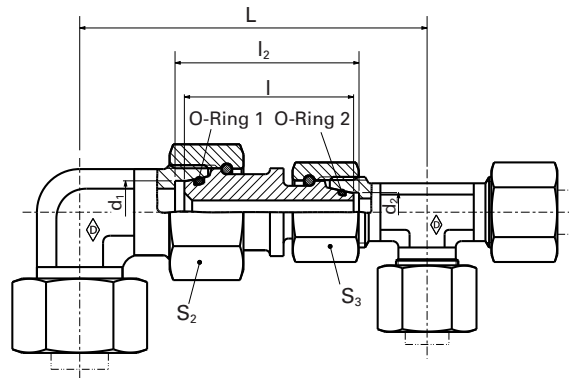

												Fitting SNV .../ ...
Series	PN bar (psi)	Tube outer diameter d ₁	Tube outer diameter d ₂	Model	L	I	I ₂	S ₁	S ₂	*O-ring 1	*O-ring 2	Part no.
S	800 (11603)	8	6	SNV 8/ 6 S	72	37	39	19	17	6 x 1.5	4.5 x 1.5	WAL612698
		10	6	SNV 10/ 6 S	76	40.5	42.5	22	17	8.5 x 1.5	4.5 x 1.5	WAL612699
		10	8	SNV 10/ 8 S	75.5	39	41	22	19	8.5 x 1.5	6 x 1.5	WAL612700
	630 (9137)	12	6	SNV 12/ 6 S	80.5	39	43	24	17	10 x 1.5	4.5 x 1.5	WAL612701
		12	8	SNV 12/ 8 S	84.5	44	46	24	19	10 x 1.5	6 x 1.5	WAL612702
		12	10	SNV 12/10 S	82.5	41.5	43.5	24	22	10 x 1.5	8.5 x 1.5	WAL612703
		16	10	SNV 16/10 S	88.5	43.5	46.5	30	22	14 x 2.0	8.5 x 1.5	WAL612704
		16	12	SNV 16/12 S	96.5	47.5	50.5	30	24	14 x 2.0	10 x 1.5	WAL612705
		20	12	SNV 20/12 S	100	48.5	52	36	24	17.3 x 2.4	10 x 1.5	WAL612706
	420 (6091)	20	16	SNV 20/16 S	108	52.5	57	36	30	17.3 x 2.4	14 x 2	WAL612707
		25	16	SNV 25/16 S	112.5	52	58	46	30	22.3 x 2.4	14 x 2	WAL612708
		25	20	SNV 25/20 S	121	58	64.5	46	36	22.3 x 2.4	17.3 x 2.4	WAL612709
		30	16	SNV 30/16 S	121.5	54	61.5	50	30	27.3 x 2.4	14 x 2	WAL612710
	400 (5801)	30	20	SNV 30/20 S	128.5	58.5	66.5	50	36	27.3 x 2.4	17.3 x 2.4	WAL612711
		30	25	SNV 30/25 S	135	60	69.5	50	46	27.3 x 2.4	22.3 x 2.4	WAL612712
		38	20	SNV 38/20 S	139	61	71.5	60	36	35 x 2.5	17.3 x 2.4	WAL612713
		38	25	SNV 38/25 S	145.5	62.5	74.5	60	46	35 x 2.5	22.3 x 2.4	WAL612714
		38	30	SNV 38/30 S	154.5	64.5	78	60	50	35 x 2.5	27.3 x 2.4	WAL612715

*For FPM (e.g. Viton) see price list / available on request