


TS ...

TS ... -1.4571

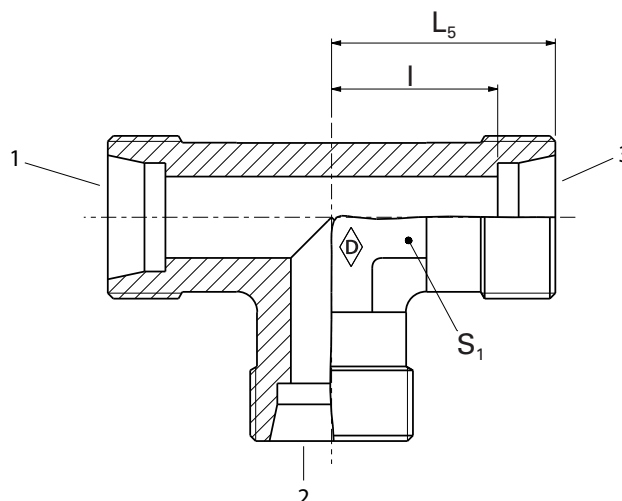

E

							System nuts for supplementing the stud (for technical data, see part D of this catalog)				
							Stud TS ...	Stud Stainless steel TS ... -1.4571*	WalringPlus W-R-Plus-M...	Walform WF-M ... VI	Walform stainless steel WF-M ... VI-1.4571*
Series	PN bar (psi)	Tube outer diameter	Model	kg/ 100 pc.	DIN 2353	Part no.	Part no.	Part no.	Part no.	Part no.	
LL	100 (1450)	4	TS 4 LL	1.4	QLL 4	WAL037887	WAL617473				
		6	TS 6 LL	1.7	QLL 6	WAL037889	WAL065339				
		8	TS 8 LL	2.5	QLL 8	WAL037890	WAL065341				
L	500 (7252)	6	TS 6 L	3.4	QL 6	WAL037891	WAL025596	WAL628467	WAL625940	WAL625980	
		8	TS 8 L	5.2	QL 8	WAL037892	WAL025597	WAL628468	WAL625941	WAL625981	
		10	TS 10 L	6.3	QL 10	WAL037893	WAL025598	WAL628469	WAL625942	WAL625982	
	400 (5801)	12	TS 12 L	8.6	QL 12	WAL037894	WAL025599	WAL628470	WAL625943	WAL625983	
		15	TS 15 L	8.9	QL 15	WAL037895	WAL025600	WAL628471	WAL625944	WAL625984	
		18	TS 18 L	14.7	QL 18	WAL037896	WAL025601	WAL628472	WAL625945	WAL625985	
	250 (3626)	22	TS 22 L	19.6	QL 22	WAL037897	WAL025602	WAL628473	WAL625946	WAL625986	
		28	TS 28 L	33.4	QL 28	WAL037898	WAL025603	WAL628474	WAL625947	WAL625987	
		35	TS 35 L	49.5	QL 35	WAL037899	WAL025604	WAL628475	WAL625948	WAL625988	
		42	TS 42 L	67.5	QL 42	WAL037900	WAL025605	WAL628476	WAL625949	WAL625989	
S	800 (11603)	6	TS 6 S	6.1	QS 6	WAL037901	WAL025606	WAL628477	WAL625950	WAL625990	
		8	TS 8 S	8.6	QS 8	WAL037902	WAL025607	WAL628478	WAL625951	WAL625991	
		10	TS 10 S	10.8	QS 10	WAL037903	WAL025608	WAL628479	WAL625952	WAL625992	
	630 (9137)	12	TS 12 S	16.0	QS 12	WAL037904	WAL025609	WAL628480	WAL625953	WAL625993	
		14	TS 14 S	13.2	QS 14	WAL037905	WAL025610				
		16	TS 16 S	16.0	QS 16	WAL037906	WAL025611	WAL628481	WAL625954	WAL625994	
	420 (6091)	20	TS 20 S	26.8	QS 20	WAL037907	WAL025612	WAL628482	WAL625955	WAL625995	
		25	TS 25 S	46.0	QS 25	WAL037908	WAL025613	WAL628483	WAL625956	WAL625996	
		30	TS 30 S	71.4	QS 30	WAL037909	WAL025614	WAL628484	WAL625957	WAL625997	
		38	TS 38 S	103.5	QS 38	WAL037910	WAL025615	WAL628485	WAL625958	WAL625998	

⚠ Caution: The pressure specifications refer to the steel version. For the stainless steel version (1.4571), please refer to the pressure specifications on page B5.