


TOYOTA STYLE FEMALE


FEMMINA DIRITTA TOYOTA SV 60°
 FEMELLE DROIT TOYOTA CÔNE 60°
 DK TOYOTA 60° KONUS
 HEMBRA GIRATORIA RECTA TOYOTA CONO 60°

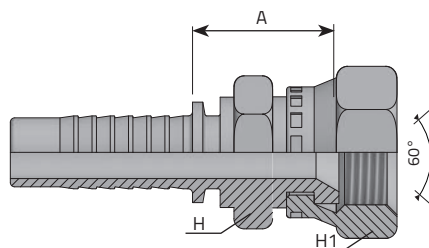

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
FDT0404	-4	1/4"	6.4	1/4"	19	17	19	51	350	5076
FDT0606	-6	3/8"	9.5	3/8"	19	19	22	54	280	4061
FDT0808	-8	1/2"	12.8	1/2"	14	22	27	60.5	200	2901
FDT1212	-12	3/4"	19	3/4"	14	27	32	70.5	200	2901
FDT1616	-16	1"	25.4	1"	11	32	38	88	160	2320
FDT2020	-20	1.1/4"	31.8	1.1/4"	11	41	50	97.5	125	1813
FDT2424	-24	1.1/2"	38.1	1.1/2"	11	50	55	110.5	100	1450

TOYOTA STYLE FEMALE - 90° ELBOW


FEMMINA 90° TOYOTA
 FEMELLE 90° TOYOTA CÔNE 60°
 DK 90° TOYOTA 60° KONUS
 HEMBRA GIRATORIA A 90° TOYOTA CONO 60°



Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90T0404	-4	1/4"	6.4	1/4"	19	19	26	23	350	5076
F90T0606	-6	3/8"	9.5	3/8"	19	22	34.5	33	280	4061
F90T0808	-8	1/2"	12.8	1/2"	14	27	41	39	200	2901
F90T1212	-12	3/4"	19	3/4"	14	32	54.5	53.5	200	2901
F90T1616	-16	1"	25.4	1"	11	38	68	73	160	2320
F90T2020	-20	1.1/4"	31.8	1.1/2"	11	50	88.5	89	125	1813
F90T2424	-24	1.1/2"	38.1	1.1/2"	11	55	109.5	101	100	1450

TOYOTA STYLE FEMALE 45° ELBOW

FEMMINA 45° TOYOTA
 FEMELLE 45° TOYOTA CÔNE 60°
 DK 45° TOYOTA 60° KONUS
 HEMBRA GIRATORIA A 45° TOYOTA CONO 60°

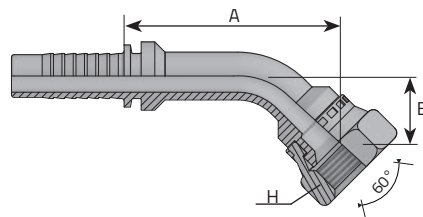

	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A		
		Inch		mm	Inch		mm	mm	mm	Bar	Psi
	F45T0404	-4	1/4"	6.4	1/4"	19	19	14	40	350	5076
	F45T0606	-6	3/8"	9.5	3/8"	19	22	16.5	55	280	4061
	F45T0808	-8	1/2"	12.8	1/2"	14	27	19	65	200	2901
	F45T1212	-12	3/4"	19	3/4"	14	32	24.5	63	200	2901
	F45T1616	-16	1"	25.4	1"	11	38	37	90	160	2320
	F45T2020	-20	1.1/4"	31.8	1.1/4"	11	50	39.5	102	125	1813
	F45T2424	-24	1.1/2"	38.1	1.1/2"	11	55	40.5	118	100	1450